


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B23P 17/00	A1	(11) International Publication Number: WO 98/30354 (43) International Publication Date: 16 July 1998 (16.07.98)
<p>(21) International Application Number: PCT/US97/24254</p> <p>(22) International Filing Date: 18 December 1997 (18.12.97)</p> <p>(30) Priority Data: 08/780,498 8 January 1997 (08.01.97) US</p> <p>(71) Applicant: NORTHROP GRUMMAN CORPORATION [US/US]; 1840 Century Park East, Los Angeles, CA 90067-2199 (US).</p> <p>(72) Inventors: RATHKE, John; 276 Fillmore Street, Centerport, NY 11721 (US). BURGER, Elvin, Charles; 199 Smith Avenue, Holbrook, Long Island, NY 11741 (US). PETERSON, Edward, M.; 150 Berry Hill Road, Syosset, NY 11791 (US). HORAN, Christopher; 12 Overlook Drive, Huntington, NY 11743 (US).</p> <p>(74) Agent: GREEN, Clarence, A.; Perman & Green, LLP, 425 Post Road, Fairfield, CT 06430 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report. With amended claims.</p>

(54) Title: ELECTROMAGNETICALLY FORMING A TUBULAR WORKPIECE

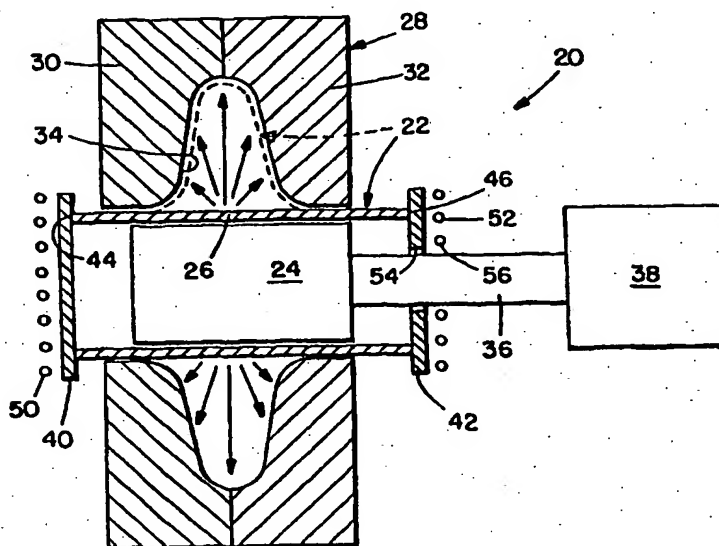

(57) Abstract

A process for electromagnetically forming an elongated tubular workpiece (22) by applying an electromagnetic force provided by an energized workcoil (24) to the workpiece radially of its longitudinal axis, and by simultaneously applying an axial compressive force to the workpiece. The radial electromagnetic force forces a section of the workpiece against a forming surface (34) of a die (28). The axial compressive force is provided at one or both ends of the workpiece by positioning one surface of an electrically conductive plate (40, 42) in engagement with an end (44, 46) of the workpiece such that the plate extends transversely to the longitudinal axis of the workpiece, and positioning a flat electrically conductive coil (50, 52) adjacent to but electrically isolated from a second surface of the plate. By energizing the flat coil, a force is created against the plate to thereby compress the workpiece between its ends.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ELECTROMAGNETICALLY FORMING A TUBULAR WORKPIECE

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to electromagnetic forming of metals and, more particularly, to forming metallic workpieces into complex shapes rapidly, easily, and with consistency.

2. Description of the Prior Art

Electromagnetic forming is a process for shaping a metal product (called the workpiece) by means of the application of electromagnetic forces. Electromagnetic forming relies on the interaction of the electromagnetic field with the metal of the workpiece. The electromagnetic field is produced by passing a time varying electric current through a coil referred to as the workcoil). The current in the workcoil can be provided by the discharge of a capacitor (or more typically by a bank of capacitors) resulting in a pulse output. The workpiece can be maintained at a temperature so that it is somewhat malleable to aid the forming process, although this is not necessary.

The electromagnetic forming process has several clear advantages. For example, there is no frictional contact between the workpiece and the field thereby allowing for a high quality finish on the workpiece. Also, the pulsed application of the electromagnetic field to the workpiece can be readily adapted to an automated "assembly line"-type process. Another advantage is that electromagnetic forming can be adapted to the formation of irregular shapes.

Electromagnetic forming processes typically display several different configurations. In one configuration, the

workpiece surrounds the workcoil so the action of the field tends to expand or bulge the workpiece. In another configuration, the workcoil and workpiece are adjacent to each other so that the field bends the workpiece away from the workcoil. Another configuration has the workcoil surrounding the workpiece so that the field compresses the workpiece. In an example of this latter configuration, electromagnetic forming can be used to compress bands of metal on cylindrical-shaped molds.

An early disclosure which is exemplary of the electromagnetic forming technique is U.S. Patent No. 3,088,200 to Birdsall et al. A number of other patents disclose a variety of improvements in the technique. These include U.S. Patents, No. 5,331,832 to Cherian et al., No. 4,962,656 to Kunerth et al., No. 4,947,667 to Gunkel et al., No. 4,878,434 to Sommet, No. 4,531,393 to Weir, and No. 4,334,417 to Victor. However, in their disclosures, none of these patents combine axial loading of the member to be formed, or workpiece, with the electromagnetic forming process as is taught by the instant disclosure. While U.S. Patent No. 4,261,092 to Corwin combines an axial compressive load with an electromagnetic forming pulse, in this instance, the axial compressive load is applied to the non-forming part of the assembly, namely, the ceramic mandrel, to prevent its destruction by the impact of the electromagnetically formed tubular member that is swaged to it. Finally, U.S. Patent No. 4,590,655 to Javorik discloses a method and apparatus for cold forming of metal and, more specifically, for mechanically expanding an elongated tubular member in directions transverse to the longitudinal axis of the member. However, there is no suggestion in the Javorik patent of using the electromagnetically forming technique.

It was in light of the foregoing that the present invention was conceived and has now been reduced to practice.

SUMMARY OF THE INVENTION

The present invention relates to a process for electromagnetically forming an elongated tubular workpiece by applying an electromagnetic force provided by an energized workcoil to the workpiece radially of its longitudinal axis and by simultaneously applying an axial compressive force to the workpiece. The axial compressive force may be applied to the workpiece from a time before applying the radial electromagnetic force. A forming member including a surface having a desired contour is provided adjacent the workpiece and the workpiece is caused by the electromagnetic force to conformingly engage the surface of the forming member and thereby assume the contoured shape of the forming member. The forming member may be a forming die which surrounds the workpiece or a forming mandrel may be positioned within the workpiece. In another embodiment, both a forming die and a forming mandrel may be employed for performing the forming operation at longitudinally spaced regions of the workpiece. The axial compressive force may be applied to the workpiece at one or both ends by positioning in engagement with an end of the workpiece one surface of a plate member of electrically conductive material, the plate member lying in a plane transverse of the longitudinal axis of the workpiece, and positioning adjacent to but electrically isolated from a second surface of the plate member a flat electrically conductive coil, then energizing the coil to create a force directed against the plate member to thereby compress the workpiece between its ends.

A particularly desirable application for the invention resides in the fabrication of niobium superconducting cavities. Niobium and many of its alloys exhibit superconductivity, that is, the lack of electrical resistance at very low temperatures. As a result, niobium is of great interest in applications relating to power

generation, propulsion devices, fusion research, electronic devices, and in numerous other applications. In a typical application, electron beam accelerators, it is desirable to fabricate a series of Niobium superconducting cavities which are joined in an end-to-end relationship. Current methods of fabricating niobium superconducting cavities require expensive and undesirable processes. Drawn cavity sections are often formed using tooling that contacts the niobium metal with high contact pressure. This contact contaminates the niobium metal. Since the drawing process forms only half cavities, the sections are subsequently joined by electron beam welding. Electron beam welding is expensive and, as with any weld, there may be voids and leaks.

Electromagnetic forming of cavities eliminates high contact pressures since the material is moved by an electromagnetic field. This process also allows the forming of whole cavities or strings of cavities, thus eliminating the need for electron beam welding at the major and minor diameter joints.

This invention applies the electromagnetic forming process to the unique geometry and material of superconducting cavities. The cavities would be formed by starting with niobium tubing, inserting an expansion coil and associated field shaper, surrounding the tubing with female tooling of the appropriate shape, and applying a current pulse or pulses to form the tubing into the tool cavity. Where extreme amounts of deflection are required, a tube with a diameter between the major and minor diameters of the desired cavity may be formed in two steps. The major diameter would be formed as described above; the minor diameters at the outboard ends of the cavity may be formed by using male tooling inside the cavity and a compression coil and field shaper outside of the tube to compress the tube when the forming pulse is applied.

Thus, when used to form superconducting cavities, the invention:

■ eliminates the need for electron beam welding at the cavity's major and minor diameters; and

■ reduces or eliminates the contamination of the niobium metal caused by the high tool contact pressure required in the drawing process.

Accordingly, a primary feature of the present invention is the provision of an improved technique for the electromagnetic forming of metals.

Another feature of the present invention is the provision of such a technique which enables the forming of metallic workpieces into complex shapes rapidly, easily, and with consistency.

A further feature of the present invention is the provision of such a technique which includes electromagnetically forming an elongated tubular workpiece by applying an electromagnetic force provided by an energized workcoil to the workpiece radially of its longitudinal axis and by simultaneously applying an axial compressive force to the workpiece.

A further feature of the present invention is the provision of such a technique according to which the axial compressive force may be applied to the workpiece from a time before applying the radial electromagnetic force.

Still another feature of the invention is the provision of such a technique according to which a forming member including a surface having a desired contour is provided adjacent the workpiece and the workpiece is caused by the electromagnetic force to conformingly engage the surface of

the forming member and thereby assume the contoured shape of the forming member.

5 Yet a further feature of the present invention is the provision of such a technique according to which the forming member may be a forming die which surrounds the workpiece or a forming mandrel which may be positioned within the workpiece.

10 Yet another feature of the invention is the provision of such a technique according to which both a forming die and a forming mandrel may be employed for performing the forming operation at longitudinally spaced regions of the workpiece, the axial compressive force being applied to the
15 workpiece at one or both ends by positioning in engagement with an end of the workpiece one surface of a plate member of electrically conductive material, the plate member lying in a plane transverse of the longitudinal axis of the workpiece, and positioning adjacent to but electrically
20 isolated from a second surface of the plate member a flat electrically conductive coil, then energizing the coil to create a force directed against the plate member to thereby compress the workpiece between its ends.

25 Other and further features, advantages, and benefits of the invention will become apparent in the following description taken in conjunction with the following drawings. It is to be understood that the foregoing general description and the following detailed description are exemplary and
30 explanatory but are not to be restrictive of the invention. The accompanying drawings which are incorporated in and constitute a part of this invention, illustrate one of the embodiments of the invention, and together with the description, serve to explain the principles of the
35 invention in general terms. Like numerals refer to like parts throughout the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagrammatic side elevation view, partly in section, illustrating apparatus operatively embodying the invention for electromagnetically forming an elongated tubular workpiece;

Fig. 2 is a diagrammatic front elevation view of one of the components illustrated in Fig. 1;

Fig. 3 is a detail side elevation view partially in section illustrating another embodiment of the apparatus depicted in Fig. 1;

Fig. 4 is a diagrammatic side elevation view, in section, generally similar to Fig. 1 and illustrating another embodiment of the invention;

Fig. 5 is a cross section view taken generally along line 5--5 in Fig. 4; and

Fig. 6 is a diagrammatic side elevation view, in section, generally similar to Figs. 1 and 4 and illustrating another embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Turn now to the drawings and, initially, to Fig. 1 which generally illustrates, diagrammatically, apparatus 20 for electromagnetically forming an elongated tubular workpiece 22 such that at the end of the operation about to be described, it will have the shape indicated by dashed lines in the figure.

This is achieved, in a first instance, by surrounding a workcoil 24 with a central region of the workpiece 22 while positioning a forming female die 28, preferably having a

pair of removable die parts 30, 32 including an inner surface 34 having a desired inner contour, so as to substantially surround the workpiece at a location generally coextensive with its central region 26. The workcoil 24 is physically and electrically connected by a suitable intermediary member 36 to an energizing source 38 which is preferably a bank of capacitors having the requisite charge capacity. Thereupon the workcoil 24 is energized by the source 38 so as to apply an electromagnetic force to the central region 26 of the workpiece 22 radially of the longitudinal axis of the workpiece. By so doing, the first region 26 of the workpiece 22 conformingly engages the inner surface 34 of the forming die 28 and thereby assumes the contoured shape of the forming die.

Either simultaneously with the operation of the workcoil 24 or from a time prior to the operation of the workcoil 24, an axial compressive force is applied to the workpiece. To this end, a pair of opposed plate members 40, 42 of electrically conductive material are positioned in engagement with each opposed end 44, 46, respectively, of the workpiece 22. Each of the plate members 40, 42 lies in a plane transverse of the longitudinal axis of the workpiece. Thereupon, a flat electrically conductive coil 50 is positioned adjacent to but electrically isolated from a surface of the plate member 40 opposite the end 44 of the workpiece 22. In a similar manner, a flat electrically conductive coil 52 is positioned adjacent to but electrically isolated from a surface of the plate member 42 opposite the end 46 of the workpiece 22. It will be appreciated that both the plate member 42 and the flat coil 52 are formed with central openings 52, 54, respectively, to accommodate the passage therethrough of the intermediary member 36 extending between the workcoil 24 and the energizing source 38.

5 The flat electrically conductive coils 50, 52 are then energized, as by a suitable EMF source 56 to create a force generally aligned with the longitudinal axis of the workpiece 22 and directed against each plate member 40, 42 to thereby compress the workpiece between the ends 44 and 46. In another embodiment, as illustrated in Fig. 3, a modified plate member 40A is held stationary and the flat coil 52 is energized to thereby drive the plate member 42 against the end 46 of the workpiece 22. The result achieve is similar to that of the Fig. 1 embodiment, but without the aid of the coil 50.

15 Turn now to Figs. 4 and 5 for the description of another embodiment of the invention. In this instance, apparatus 60 for electromagnetically forming the elongated tubular workpiece 22 includes a tubular field shaper 62 of electrically conductive material positioned intermediate the forming die 28 and the workcoil 24. The field shaper 62 has an outer contoured surface 64 for optimum shaping of the workpiece 22 in conformity with the surface 34 of the forming die 28. Preferably of beryllium copper alloy and split longitudinally as indicated at 66 (Fig. 5), the field shaper 62 operates to optimize the operation of inducing the central region of the workpiece to most readily conform to the contour of the inner surface 34 for a given thickness of the workpiece. For example, the field can be reduced near the entry to the die cavity to reduce the pressure exerted, and therefore the friction between the workpiece and the die.

30 In still another embodiment of the invention, referring now to Fig. 6, provision is made for the instance in which the thickness of a workpiece 72 is relatively great or in which the material of the workpiece is relatively hard. In such an instance, it may be difficult to deform the workpiece 72 to conform to an inner surface 34 (Figs. 1 and 4) which is relatively deep. In such an instance, it might be

desirable to provide a forming die 74 including die parts 76, 78 having an inner surface 80 having a desired contour which substantially surrounds the workpiece. A central region 82 of the workpiece 72 may then be operated upon as previously described to conform, as indicated by dashed lines in Fig. 6, with the inner surface 80. However, as noted above, the depth of the inner surface 80 is not as great as that of the inner surface 34.

In order to complete the forming operation, a second region 84 of the workpiece which is longitudinally spaced from the central region 82 is surrounded with a second workcoil 86 which may be a part of the forming die 74 or part of a separate or distinct component. In this instance, a forming mandrel 88 including an outer surface having a desired outer contour is positioned within the workpiece 72 at a location generally coextensive with the second region 84 of the workpiece. The workcoil 86 is then energized so that the second region 84 of the workpiece 72 conformingly engages the contoured outer surface 90 of the forming mandrel 88 and thereby assumes the contoured shape of the forming mandrel. This completes the forming operation and the resulting formed workpiece is indicated by dashed lines in Fig. 6.

While preferred embodiments of the invention have been disclosed in detail, it should be understood by those skilled in the art that various other modifications may be made to the illustrated embodiments without departing from the scope of the invention as described in the specification and defined in the appended claims.

CLAIMS

What is claimed is:

1. A process for electromagnetic forming of an elongated tubular workpiece having a longitudinal axis comprising the steps of:

(a) applying to the workpiece radially of the longitudinal axis thereof an electromagnetic force provided by a workcoil connected to an energizing source; and

(b) simultaneously with step (a), applying an axial compressive force to the workpiece.

2. A process as set forth in claim 1 including the step of:

(c) applying an axial compressive force to the workpiece prior to performing step (b).

3. A process as set forth in claim 1

wherein step (a) includes the steps of:

(c) providing a forming member including a surface having a desired contour adjacent the workpiece; and

(d) causing the workpiece to conformingly engage the surface of the forming member and thereby assume the contoured shape of the forming member.

4. A process as set forth in claim 3

wherein step (c) includes the steps of:

(e) surrounding the workcoil of step (a) with the workpiece;

(f) positioning a forming die including an inner surface having a desired inner contour so as to substantially surround the workpiece; and

(g) energizing the workcoil so that the workpiece conformingly engages the inner surface of the forming die and thereby assumes the contoured shape of the forming die.

5. A process as set forth in claim 3

wherein step (c) includes the steps of:

(e) surrounding the workpiece with the workcoil of step (a);

(f) positioning a forming mandrel including an outer surface having a desired outer contour within the workpiece; and

(g) energizing the workcoil so that the workpiece conformingly engages the contoured outer surface of the forming mandrel and thereby assumes the contoured shape of the forming mandrel.

6. A process as set forth in claim 3

wherein steps (c) and (d) include the steps of:

(e) surrounding a first workcoil according to step (a) with a first region of the workpiece;

(f) positioning a forming die including an inner surface having a desired inner contour so as to

substantially surround the workpiece at a location generally coextensive with the first region of the workpiece;

(g) energizing the workcoil so that the first region of the workpiece conformingly engages the inner surface of the forming die and thereby assumes the contoured shape of the forming die;

(h) surrounding a second region of the workpiece longitudinally spaced from the first region thereof with a second workcoil according to step (a);

(i) positioning a forming mandrel including an outer surface having a desired outer contour within the workpiece at a location generally coextensive with the second region of the workpiece; and

(j) energizing the workcoil so that the second region of the workpiece conformingly engages the contoured outer surface of the forming mandrel and thereby assumes the contoured shape of the forming mandrel.

7. A process as set forth in claim 1

wherein step (b) includes the steps of:

(c) holding stationary a first end of the workpiece;

(d) positioning in engagement with a second end of the workpiece one surface of a plate member of electrically conductive material, the plate member lying in a plane transverse of the longitudinal axis of the workpiece;

(e) positioning adjacent to but electrically isolated from a second surface of the plate member a flat

electrically conductive coil; and

(f) energizing the flat electrically conductive coil to create a force generally aligned with the longitudinal axis of the workpiece and directed against the plate member to thereby compress the workpiece between the first and second ends thereof.

8. A process as set forth in claim 1

wherein step (b) includes the steps of:

(c) positioning in engagement with each opposed end of the workpiece one surface of a plate member of electrically conductive material, the plate member lying in a plane transverse of the longitudinal axis of the workpiece;

(d) positioning adjacent to but electrically isolated from a second surface of each plate member a flat electrically conductive coil; and

(f) energizing the flat electrically conductive coils to create a force generally aligned with the longitudinal axis of the workpiece and directed against each plate member to thereby compress the workpiece between the first and second ends thereof.

9. A process as set forth in claim 4 including the steps of:

(h) positioning intermediate the forming die and the workcoil a tubular field shaper of electrically conductive material and having an outer contour for optimum shaping of the workpiece in conformity with the surface of the forming die.

AMENDED CLAIMS

[received by the International Bureau on 26 May 1998 (26.05.98);
original claims 1-9 replaced by amended claims 1-6 (5 pages)]

1. A process for electromagnetic forming of an elongated tubular metallic workpiece having a longitudinal axis into a product having a complex outer shape comprising the steps of:

(a) providing a workcoil connected to an energizing source;

(b) surrounding the workpiece with the workcoil of step (a);

(c) positioning a forming mandrel including an outer surface having a desired outer contour within the workpiece;

(d) energizing the workcoil so that an electromagnetic force is applied radially of the longitudinal axis of the workpiece such that the workpiece conformingly engages the outer contoured surface of the forming mandrel and thereby assumes the contoured shape of the forming mandrel; and

(e) simultaneously with step (d), applying an axial compressive force to the workpiece.

2. A process as set forth in claim 1 including the step of:

applying an axial compressive force to the workpiece prior to performing step (d).

3. A process as set forth in claim 1

wherein step (e) includes the steps of:

holding stationary a first end of the workpiece;

positioning in engagement with a second end of the workpiece one surface of a plate member of electrically conductive material, the plate member lying in a plane transverse of the longitudinal axis of the workpiece;

positioning adjacent to but electrically isolated from a second surface of the plate member a flat electrically conductive coil; and

energizing the flat electrically conductive coil to create a force generally aligned with the longitudinal axis of the workpiece and directed against the plate member to thereby compress the workpiece between the first and second ends thereof.

4. A process as set forth in claim 1

wherein step (e) includes the steps of:

positioning in engagement with each opposed end of the workpiece one surface of a plate member of electrically conductive material, the plate member lying in a plane transverse of the longitudinal axis of the workpiece;

positioning adjacent to but electrically isolated from a second surface of each plate member a flat electrically conductive coil; and

energizing the flat electrically conductive coils to create a force generally aligned with the longitudinal

axis of the workpiece and directed against each plate member to thereby compress the workpiece between the first and second ends thereof.

5. A process for electromagnetic forming of an elongated tubular metallic workpiece having adjoining first and second regions and a longitudinal axis into a product having a complex outer shape comprising the steps of:

(a) surrounding a first workcoil connected to an energizing source with the first region of the workpiece;

(b) positioning a forming die including an inner surface having a desired inner contour so as to substantially surround the workpiece at a location generally coextensive with the first region of the workpiece;

(c) energizing the first workcoil so that an electromagnetic force is applied radially of the longitudinal axis of the workpiece such that the first region of the workpiece conformingly engages the inner surface of the forming die and thereby assumes the contoured shape of the forming die;

(d) surrounding the second region of the workpiece longitudinally spaced from the first region thereof with a second workcoil connected to an energizing source;

(e) positioning a forming mandrel including an outer surface having a desired outer contour within the workpiece at a location generally coextensive with the second region of the workpiece; and

(f) energizing the second workcoil so that an electromagnetic force is applied radially of the longitudinal axis of the workpiece such that the second region of the workpiece conformingly engages the contoured outer surface of the forming mandrel and thereby assumes the contoured shape of the forming mandrel.

6. A process for electromagnetic forming of an elongated tubular metallic workpiece having adjoining first and second regions and a longitudinal axis into a product having a complex outer shape comprising the steps of:

(a) providing a tubular field shaper of electrically conductive material and having an outer contour for optimum shaping of the first region of the workpiece and a workcoil within the field shaper connected to an energizing source;

(b) surrounding the field shaper of step (a) with the first region of the workpiece;

(c) positioning a forming die including an inner surface having a desired inner contour so as to substantially surround the first region of the workpiece;




(d) energizing the workcoil within the field shaper so that an electromagnetic force is applied radially of the longitudinal axis of the workpiece against the workpiece such that the field shaper induces the first region of the workpiece to conform to the inner surface of the forming die and thereby assume the contoured shape of the forming die;




(e) surrounding the second region of the workpiece longitudinally spaced from the first region thereof with a second workcoil connected to an energizing source;

(f) positioning a forming mandrel including an outer surface having a desired outer contour within the workpiece at a location generally coextensive with the second region of the workpiece; and

(g) energizing the second workcoil so that an electromagnetic force is applied radially of the longitudinal axis of the workpiece such that the second region of the workpiece conformingly engages the contoured outer surface of the forming mandrel and thereby assumes the contoured shape of the forming mandrel.

1/2

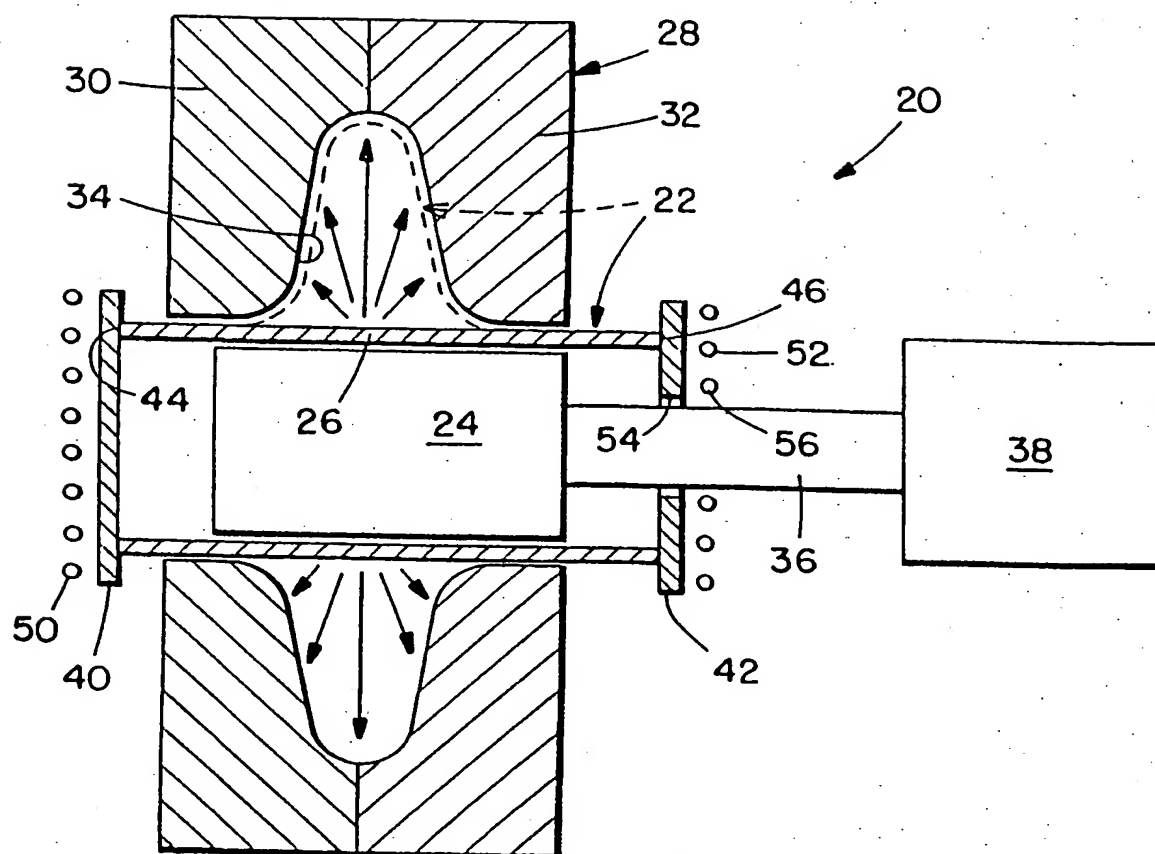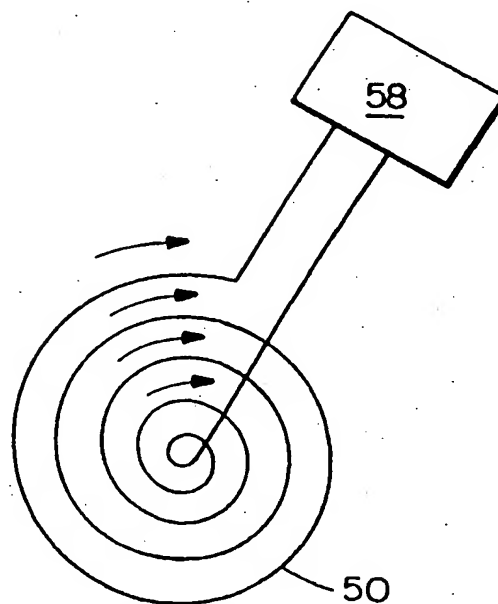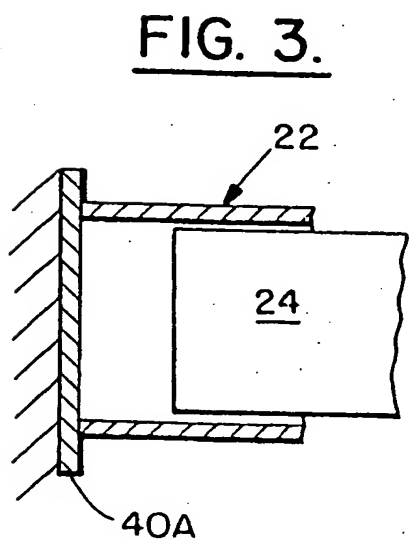FIG. 1.FIG. 2.

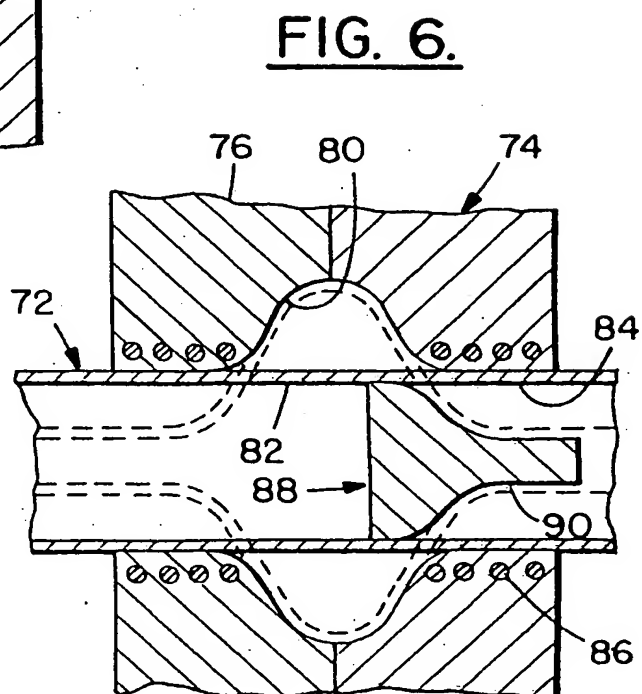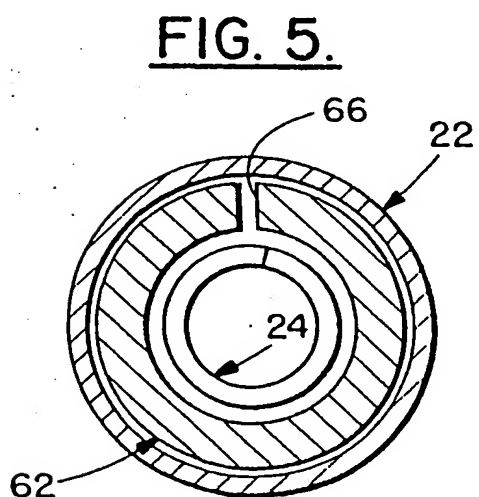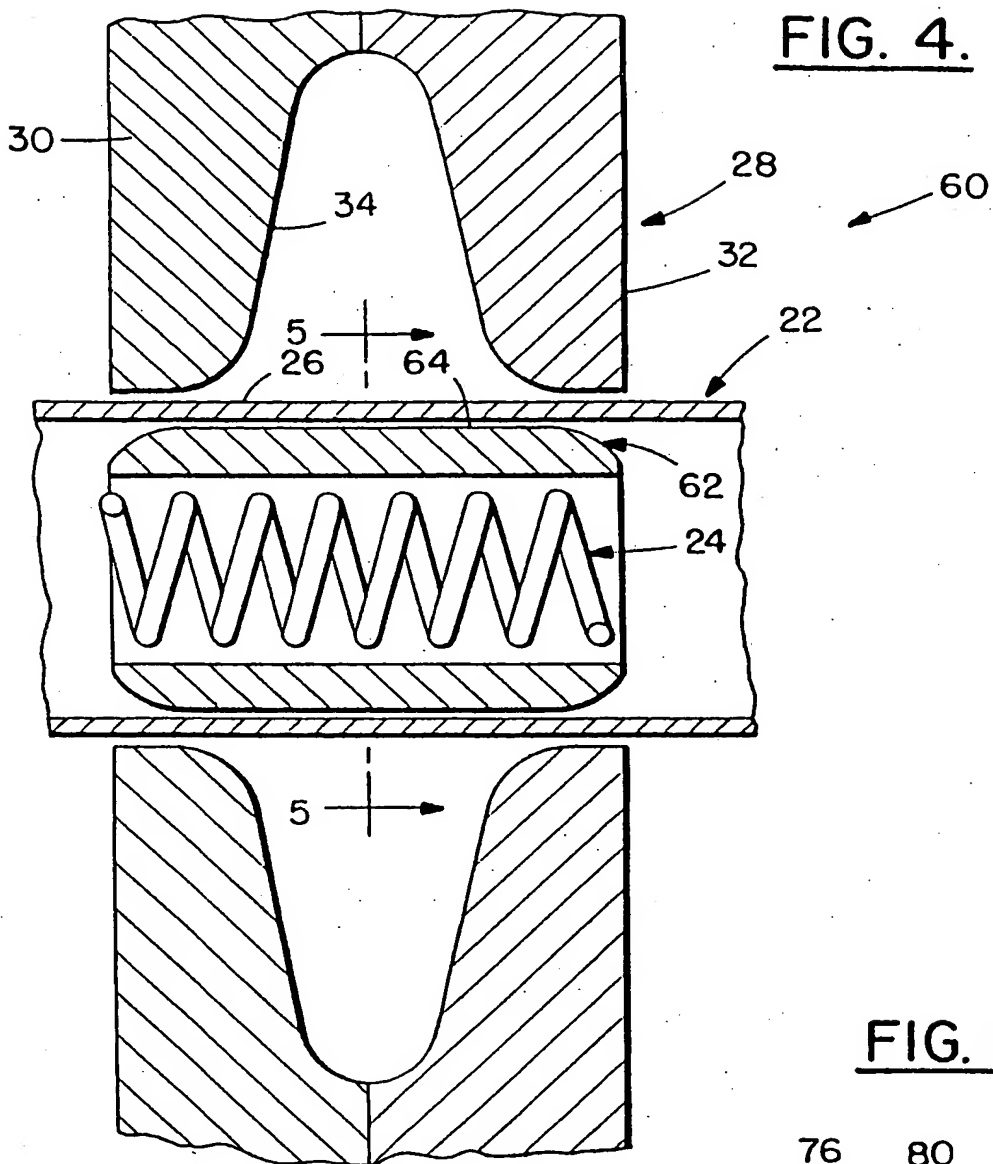

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/24254

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B23P 17/00

US CL :29/419.2

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 29/419.2, 421.1; 72/56; 264/427; 425/3

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,513,598 A (COSTABILE) 30 April 1985. See Figures 2A and 2B.	1-4 and 7-9
Y	US 2,976,907 A (HARVEY et al.) 28 March 1961. See Figures 9 and 10.	1-4 and 7-9
Y	US 3,092,165 A (HARVEY) 04 June 1963. See Figure 1 and column 2 (lines 23-47).	7 and 8
A	US 5,485,737 A (DICKERSON) 23 January 1996. See Figures 1-4, which teach simultaneous application of a radial force and an axial compressive force to deform a tubular workpiece.	1-9

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 MARCH 1998

Date of mailing of the international search report

14 APR 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

DAVID BRYANT

Telephone No. (703) 308-1148

Sheila Veney
Paralegal Specialist
Group 3203 3700

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/24254

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,840,053 A (NAKAMURA) 20 June 1989. See Figures 9 and 10, which teach simultaneous application of a radial force and an axial compressive force to deform a tubular workpiece.	1-9
A	US 5,097,689 A (PIETROBON) 24 March 1992. See Figures 3, 8, and 9, which teach simultaneous application of a radial force and an axial compressive force to deform a tubular workpiece.	1-9
A	US 3,394,569 A (SMITH) 30 July 1968. See Figures 1-3, which teach simultaneous application of a radial force and an axial compressive force to deform a tubular workpiece.	1-9
A	US 4,590,655 A (JAVORIK) 27 May 1986. See Figures 2 and 3, which teach simultaneous application of a radial force and an axial compressive force to deform a tubular workpiece.	1-9

Form PCT/ISA/210 (continuation of second sheet)(July 1992)★




European Patent Office
80298 MUNICH
GERMANY
Tel.: +49 89 2399 - 0
Fax: +49 89 2399 - 4465

Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Müller-Boré & Partner
Patentanwälte
Grafinger Strasse 2
81671 München
ALLEMAGNE

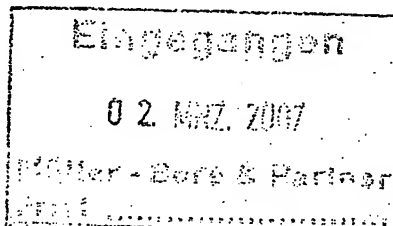

EPO Customer Services

Tel.: +31 (0)70 340 45 00

Date

02.03.07

Reference
K 3197EU - py

Application No./Patent No.
03753961.6 - 2302 PCT/JP0312372

Applicant/Proprietor
KABUSHIKI KAISHA KOBE SEIKO SHO

COMMUNICATION

The European Patent Office herewith transmits as an enclosure the supplementary European search report under Article 157(2)(a) EPC for the above-mentioned European patent application.

If applicable, copies of the documents cited in the European search report are attached.

☒ Additional set(s) of copies of the documents cited in the European search report is (are) enclosed as well.

Refund of the search fee

If applicable under Article 10 Rules relating to fees, a separate communication from the Receiving Section on the refund of the search fee will be sent later.





European Patent
Office

SUPPLEMENTARY
EUROPEAN SEARCH REPORT

Application Number
EP 03 75 3961

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X X X X	DE 32 15 029 A1 (MAGYAR ALUMINIUM [HU]; KOHO ES GEPIPARI MINISZTERIUM [HU]) 9 December 1982 (1982-12-09) * the whole document *	1-21	INV. B21D26/14 B21D39/08 B21D53/26
	WO 98/30354 A (NORTHROP GRUMMAN CORP [US]) 16 July 1998 (1998-07-16) * the whole document *	1-21	
	FR 2 570 303 A1 (LEROY MAURICE [FR]) 21 March 1986 (1986-03-21) * the whole document *	1-21	
	WO 97/45216 A (NORTHROP GRUMMAN CORP [US]) 4 December 1997 (1997-12-04) * abstract; figures *	1-21	
The supplementary search report has been based on the last set of claims valid and available at the start of the search.			TECHNICAL FIELDS SEARCHED (IPC)
			B21D
Place of search Munich		Date of completion of the search 22 February 2007	Examiner Meritano, Luciano
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

FILED
3-18-05

FILED
3-18-05

1
EPO FORM 1503 03.82 (P04C04)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 75 3961

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-02-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 3215029	A1	09-12-1982	FR 2504459 A1	29-10-1982
			HU 184429 B	28-08-1984
			IT 1151150 B	17-12-1986
			JP 58004601 A	11-01-1983
NO 9830354	A	16-07-1998	EP 0964770 A1	22-12-1999
			US 5826320 A	27-10-1998
FR 2570303	A1	21-03-1986	NONE	
WO 9745216	A	04-12-1997	AU 713250 B2	25-11-1999
			AU 3124797 A	05-01-1998
			CA 2255972 A1	04-12-1997
			EP 0925129 A1	30-06-1999
			JP 2000511467 T	05-09-2000
			KR 20000016308 A	25-03-2000
			RU 2182054 C2	10-05-2002